


STA 100+05 TO STA 114+68, BURLINGTON AVENUE

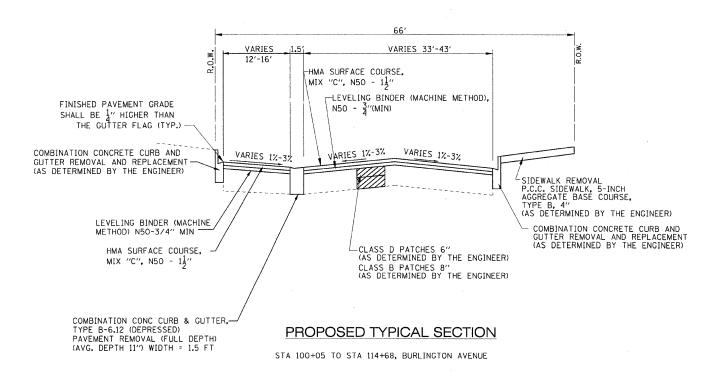

SECTION COUNTY • 09-00083-00-RS СООК STA. FED. ROAD DIST. NO ILLINOIS C-91-773-09

* FAU 3557 BURLINGTON AVENUE CONTRACT NO. 63332

HOT-MIX ASPHALT MIXTURE REQUIREMENTS

NOTE: CONTRACTOR SHALL MILL BEFORE PATCHING

ITEM	AIR VOIDS
RESURFACING	
HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50 - 1 1/2 INCH (IL 9.5mm)	4% © 50 Gyr
LEVELING BINDER (MACHINE METHOD) N50 - 3/4" (IL 9.5mm)	4% © 50 Gyr
INCIDENTAL RESURFACING	
INCIDENTAL HOT-MIX ASPHALT SURFACING	4% © 50 Gyr
PATCHING	
CLASS D PATCHES (HMA BINDER IL-19mm) TYPE I-IV - 6 INCH	4% © 70 Gyr

- 1. THE UNIT WEIGHT USED TO CALCULATE ALL HOT-MIX ASPHALT SURFACE MIXTURE IS 112 LBS/SQ YD/IN.
- 2. THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG 70-22 AND FOR NON-POLYMERIZED HMA THE "AC TYPE" SHALL BE "PG 64-22" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS." FOR "PERCENT OF RAP" SEE DISTRICT ONE SPECIAL PROVISIONS.

REVISED - PER IDOT 10-2-09 DESIGNED JGH/CAC DRAWN BCD REVISED CHECKED NJP REVISED 07-20-09 FILE - 090347-ExTypSec.sht

VILLAGE OF LA GRANGE, ILLINOIS FAU 3557 BURLINGTON AVENUE RESURFACING SECTION 09-00083-00-RS

TYPICAL SECTIONS AND HMA MIXTURE REQUIREMENTS

STA.

TO STA.

SCALE: NONE

COUNTY TOTAL SHEET NO.

COOK 17 4 SECTION 09-00083-00-RS CONTRACT NO. 63332